


ELITE CLASSIC CL24 (SL-A2IRXXX-24CL)

HIGH POWER INFRARED ILLUMINATOR

SPECIFICATION

Max Distance	120m (394ft)
Beam Angle	10° - 120m (394ft) 25° - 50m (164ft) 35° - 25m (82ft)
Optics Type	IR LED
Input Voltage	24VAC, 12 to 24VDC
Weight	0.85 kg (1.9lbs)
IP Rating	IP66, Compliance to EN60529
IK Rating	IK10, Compliance to EN62262
Operating Temperature	-50 to 50°C
Color	Black
Wavelength	850nm (940nm option available)
Dimension	154 x 105 x 54mm (6"x4.1"x2.1")
Mounting	U-bracket (Included)
Safety Standard	CE:EN61000-6-3 EN50130-4 EN62471 (Light Safety) FCC Class B (Part 15) VCCI Class B ITE C-tick AS/NZS CISPR 15

DIMENSION

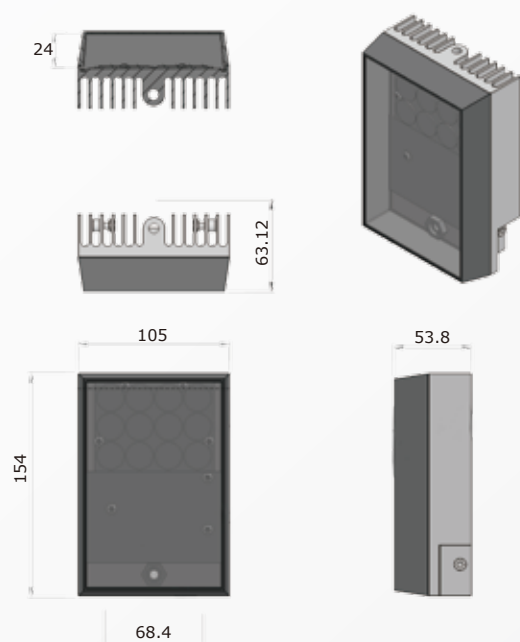

ELITE Power Expandability

Input Type	24VAC, 12 to 24VDC
Output Type	24VAC, 12 to 24VDC
Secondary Unit	Yes

Integrated Command and Control

Standard	Built-in photocell for automatic IR On/Off
----------	--



FEATURE



Standard Bracketry



Standard U Bracket (Included)
UBS-24

Optional Bracketry



L-type single Mount Bracket
LBS-001

Optional Bracketry



U-type Pole Mount Bracket
UBS-001

Optional Bracketry



L-type Dual Mount Bracket
LBS-002

Optional Bracketry



L-type Triple Mount Bracket
LBS-003

PRODUCTS

Part Number	Voltage	Optics Type	Beam Angle	Mounting
SL-A2IR1010-24CL	24 VAC, 12 to 24VDC	IR LED	10°	U-bracket
SL-A2IR2525-24CL	24 VAC, 12 to 24VDC	IR LED	25°	U-bracket
SL-A2IR3535-24CL	24 VAC, 12 to 24VDC	IR LED	35°	U-bracket
SL-A2IR3065-24CL	24 VAC, 12 to 24VDC	IR LED	30°X65°	U-bracket