


ELITE CLASSIC CL48 (SL-A2IRXXX-48CL)

HIGH POWER INFRARED ILLUMINATOR

SPECIFICATION

Max Distance	200m (656ft)
Beam Angle	10° - 200m (656ft)
	25° - 80m (262ft)
	35° - 40m (131ft)
	30°X65°
Optics Type	IR LED
Input Voltage	24VAC/DC
Weight	1.4 kg (3.1lbs)
IP Rating	IP66, Compliance to EN60529
IK Rating	IK10, Compliance to EN62262
Operating Temperature	-50 to 50°C
Color	Black
Wavelength	850nm (940nm option available)
Dimension	176 x 133 x 75mm (6.9"x5.2"x3")
Mounting	U-bracket (Included)
Safety standard	CE:EN61000-6-3
	EN50130-4
	EN62471 (Light Safety)
	FCC Class B (Part 15)
	VCCI Class B ITE
	C-tick AS/NZS CISPR 16

DIMENSION

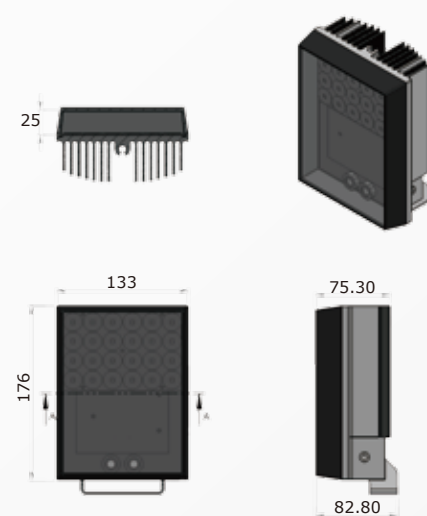

ELITE Power Expandability

Input Type	24VAC/DC
Output Type	24VAC/DC
Secondary Unit	Yes

Integrated Command and Control

Standard	Built-in photocell for automatic IR On/Off
----------	--



FEATURE



Expandability



Long Range Illumination



Waterproof IP66



Impact Protection IK10



10 Year Life



Even Illumination



PRODUCTS

Part Number	Voltage	Optics Type	Beam Angle	Mounting
SL-A2IR1010-48CL	24 VAC	IR LED	10°	U-bracket
SL-A2IR2525-48CL	24 VAC	IR LED	25°	U-bracket
SL-A2IR3535-48CL	24 VAC	IR LED	35°	U-bracket
SL-A2IR3065-48CL	24 VAC	IR LED	30°X65°	U-bracket