


ELITE CLASSIC CL48

HIGH POWER INFRARED ILLUMINATOR

SPECIFICATION

Max Distance	220m (722ft)
Beam Angle	10°- 220m (722ft) 25°- 120m (394ft) 60°- 65m (213ft)
Optics Type	IR LED
Input Power	60W max
Input Voltage	24VAC/DC
Weight	1.4 kg (3.1lbs)
IP Rating	IP66, Compliance to EN60529
IK Rating	IK10, Compliance to EN62262
Operating Temperature	-50 to +50 °C (-58 to 122°F)
Color	Black
Wavelength	850nm (940nm option available)
Dimension	176 x 133 x 75mm (6.9"x5.2"x3")
Mounting	U-bracket (Included)
Safety standard	CE: EN61000-6-3, EN50130-5 EN62031(LVD) EN62471(Light Safety) FCC Class B (Part 15) VCCI Class B ITE C-tick AS/NZS CISPR 16 UL 8751

DIMENSION

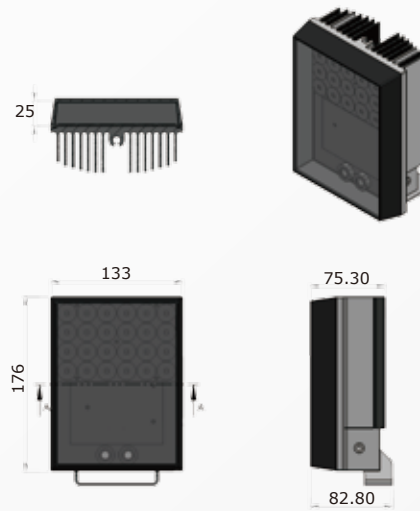

ELITE Power Expandability

Input Type	24VDC (Max 4A)
Output Type	24VDC (Max 48W)
Secondary Unit	Yes
Maximum Expandability	1

Integrated Command and Control

Standard	Built-in photocell for automatic IR On/Off
----------	--



FEATURE



Expandability



Long Range Illumination



Waterproof IP66



Impact Protection IK10



10 Year Life



Even Illumination



Standard Bracketry

Standard U Bracket (Included)
UBS-48

Optional Bracketry




U-type Pole Mount Bracket
UBS-001

Optional Bracketry



L-type single Mount Bracket
LBS-001

Optional Bracketry

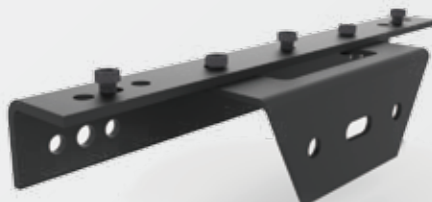

L-type Triple Mount Bracket
LBS-003

PRODUCTS

Part Number	Voltage	Input Power	Beam Angle	Mounting
SL-A2IR10-48CL	24 VAC/DC	60W max	10°	U-bracket
SL-A2IR25-48CL	24 VAC/DC	60W max	25°	U-bracket
SL-A2IR60-48CL	24 VAC/DC	60W max	60°	U-bracket


ELITE CLASSIC CL48

HIGH POWER INFRARED ILLUMINATOR

SPECIFICATION

Max Distance	220m (722ft)
Beam Angle	10°- 220m (722ft) 25°- 120m (394ft) 60°- 65m (213ft)
Optics Type	IR LED
Input Power	60W max
Input Voltage	24VAC/DC
Weight	1.4 kg (3.1lbs)
IP Rating	IP66, Compliance to EN60529
IK Rating	IK10, Compliance to EN62262
Operating Temperature	-50 to +50°C (-58 to 122°F)
Color	Black
Wavelength	850nm (940nm option available)
Dimension	176 x 133 x 75mm (6.9"x5.2"x3")
Mounting	U-bracket (Included)
Safety standard	CE: EN61000-6-3, EN50130-5 EN62031(LVD) EN62471(Light Safety) FCC Class B (Part 15) VCCI Class B ITE C-tick AS/NZS CISPR 16 UL 8751

DIMENSION

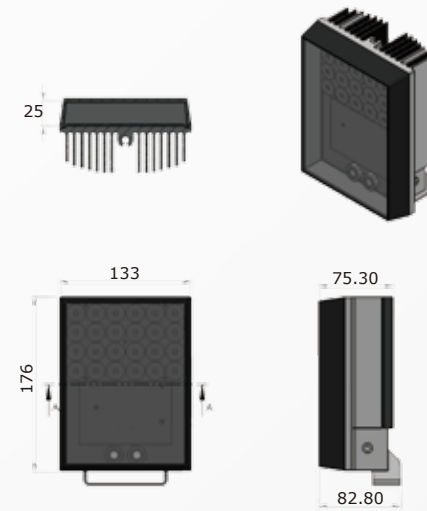

ELITE Power Expandability


Input Type	24VDC (Max 4A)
Output Type	24VDC (Max 48W)
Secondary Unit	Yes
Maximum Expandability	1

Integrated Command and Control

Standard	Built-in photocell for automatic IR On/Off
----------	--



FEATURE

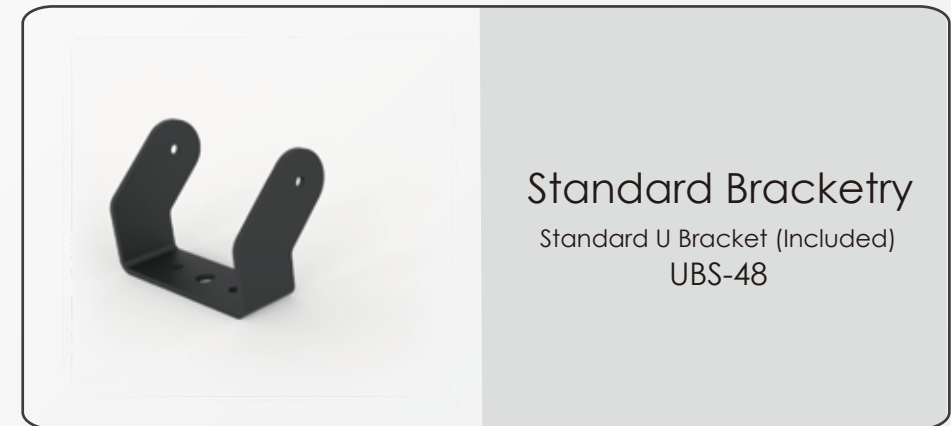

PRODUCTS

Part Number	Voltage	Input Power	Beam Angle	Mounting
SL-A2IR10-48CL	24 VAC/DC	60W max	10°	U-bracket
SL-A2IR25-48CL	24 VAC/DC	60W max	25°	U-bracket
SL-A2IR60-48CL	24 VAC/DC	60W max	60°	U-bracket