


# ELITE PLUS PL48 (SL-UPIRXXX-48PL)

HIGH POWER INFRARED ILLUMINATOR

## SPECIFICATION

Max Distance	200m (656ft)
Beam Angle	10° - 200m (656ft)
	25° - 80m (262ft)
	35° - 40m (131ft)
	30°X65°
Optics Type	IR LED
Input	UPoE
Weight	1.4 kg (3.1lbs)
IP Rating	IP66, Compliance to EN60529
IK Rating	IK10, Compliance to EN62262
Operating Temperature	-50 to 50°C
Color	Black
Wavelength	850nm (940nm option available)
Dimension	176 x 133 x 75mm (6.9"x5.2"x3")
Mounting	U-bracket (Included)
Safety standard	CE:EN61000-6-3
	EN50130-4
	EN62471 (Light Safety)
	FCC Class B (Part 15)
	VCCI Class B ITE
	C-tick AS/NZS CISPR 16

## DIMENSION

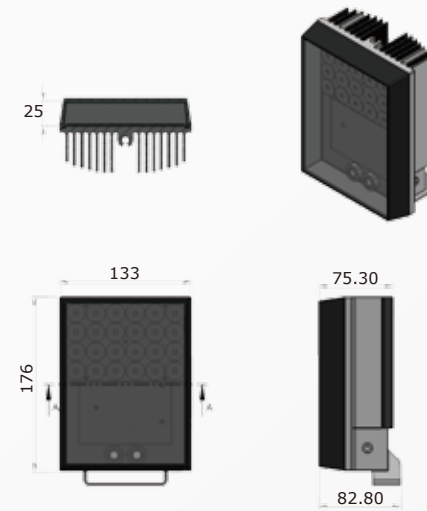

## ELITE Power Expandability

Input Type	UPoE Compliant Interface
Output Type	24VDC (2A)
Secondary Unit	Yes

## Integrated Command and Control

Standard	Built-in photocell for automatic IR On/Off
----------	--------------------------------------------



## FEATURE



Expandability

Long Range Illumination

Waterproof IP66

Impact Protection IK10

10 Year Life

Even Illumination



## PRODUCTS

Part Number	Input	Optics Type	Beam Angle	Mounting
SL-UPIR1010-48PL	UPoE	IR LED	10°	U-bracket
SL-UPIR2525-48PL	UPoE	IR LED	25°	U-bracket
SL-UPIR3535-48PL	UPoE	IR LED	35°	U-bracket
SL-UPIR3065-48PL	UPoE	IR LED	30°X65°	U-bracket